


SpoilVac – The Highest Quality, Most Reliable Vac System Available



SpoilVac

by **VACMASTERS**

- Directional boring slurry clean-up
- Potholing to locate utilities
- Valve box cleanout
- Clean out manways, culverts, car wash pits, etc.
- Damage-free sign-post installation
- Flood clean-up

SpoilVac

By

VACMASTERS

Powerful, convenient mud cleanup with optional high-pressure water for potholing



The Original Multi-Purpose Vacuum System

SpoilVac is the tool of choice for professionals nationwide! Hundreds of satisfied customers rely on *SpoilVac* for quick and easy clean up of directional boring slurry and clean out of valve boxes, catch basins, underground vaults, etc. With the optional high-pressure water system, operators can quickly pothole to determine the exact location of the borehead or nearby buried utilities.

SpoilVac's skid-mount design allows for mounting on a truck or trailer so you can get the ideal configuration for your job needs.

SpoilVac is Flexible and is Still the Best Price.

SpoilVac systems are available in trailer, truck or skid mounted models, with tank sizes ranging from 200 to 1,200 gallons, with gas or diesel power, in 3" or 4" vacuum hose sizes and with a wide assortment of tools and accessories to meet your particular job requirements. In addition, you can buy *SpoilVac* direct from VACMASTERS, saving the typical 30% dealer mark-up you pay when buying one of our competitors' products. You still get factory technical support with next-day parts availability.



SpoilVac Advantages

Lower costs and increase profits

- *Make clean-up fast, simple and safe*
- *Reduce damage claims by knowing exactly where buried utilities are located*

Generate new sources of revenue

- *Enables you to do different jobs — from cleaning out valve boxes, catch basins, culverts and vaults, to HDD slurry clean-up, to damage-free installation of sign posts and guard rails*

Satisfied customers

- *Leave the job site clean and looking undisturbed, allowing your clients to feel comfortable that the job was professionally done*



VACMASTERS Air-Vacuum Excavation Systems

If your work requires frequent location of utilities that can be damaged by high-pressure water, consider a VACMASTERS Air-Vacuum Excavation System as an alternative to the *SpoilVac*. Able to do everything a hydrovac can and more, our air systems, with on-board water should you need it, are used by more than 1,000 companies who appreciate the economic and safety benefits that potholing with air offers. VACMASTERS has a complete line-up of air-vacuum systems designed to do your jobs, big or small.

To see VACMASTERS air in action, view our demo at www.vacmasters.com.

For more information on SpoilVac or our air-vacuum excavation systems, call VACMASTERS toll-free at 1-800-466-7825, e-mail the address below, or visit our Web site.

VACMASTERS

The Leader in Air-Vacuum Excavation

5879 West 58th Avenue, Arvada, CO 80002

303-467-3801 • 1-800-466-7825

Email: sales@vacmasters.com

www.vacmasters.com

SpoilVac Benefits

SIMPLICITY IN FUNCTION AND DESIGN

- Everything you need and only what you need
- Less maintenance and downtime.

RUGGED CONSTRUCTION

- Built tough to withstand the harshest environments and most difficult jobs

POWERFUL POSITIVE-DISPLACEMENT BLOWER

- High level continuous vacuum without the need to prime or keep the inlet hose submerged
- Ideal for removing mud from roadways or grassy surfaces

OPTIONAL HIGH-PRESSURE WATER SYSTEM

- Enables you to quickly pothole to determine the exact location of a utility or the borehead
- Also includes low-pressure/high-volume spray wand for a wide assortment of clean-up jobs

HYDRAULICALLY OPERATED DUMPING

- Quick, easy emptying of spoils tank

25 HP KOHLER GASOLINE ENGINE OR 49 HP KUBOTA DIESEL ENGINE

- Quiet, dependable power that meets or exceeds EPA and State of California emission requirements

SPACE SAVING INSTALLATION

- Separate skid-mounted powerhead and spoils tank offer mounting flexibility

TRUCK OR TRAILER MOUNTING

- Whichever best suits your needs

CYCLONIC FILTRATION SYSTEM

- Minimizes filter cleaning — when it is necessary, simply clean and reinstall


ACRYLIC URETHANE PAINT

- High-quality paint combined with bead-blasted metal surfaces means fast, easy clean-up and a machine that will look good for years

FORWARD TANK CLEAN-OUT PORT

- Provides convenient, clean access to the tank interior for fast, mess-free tank cleaning

Features

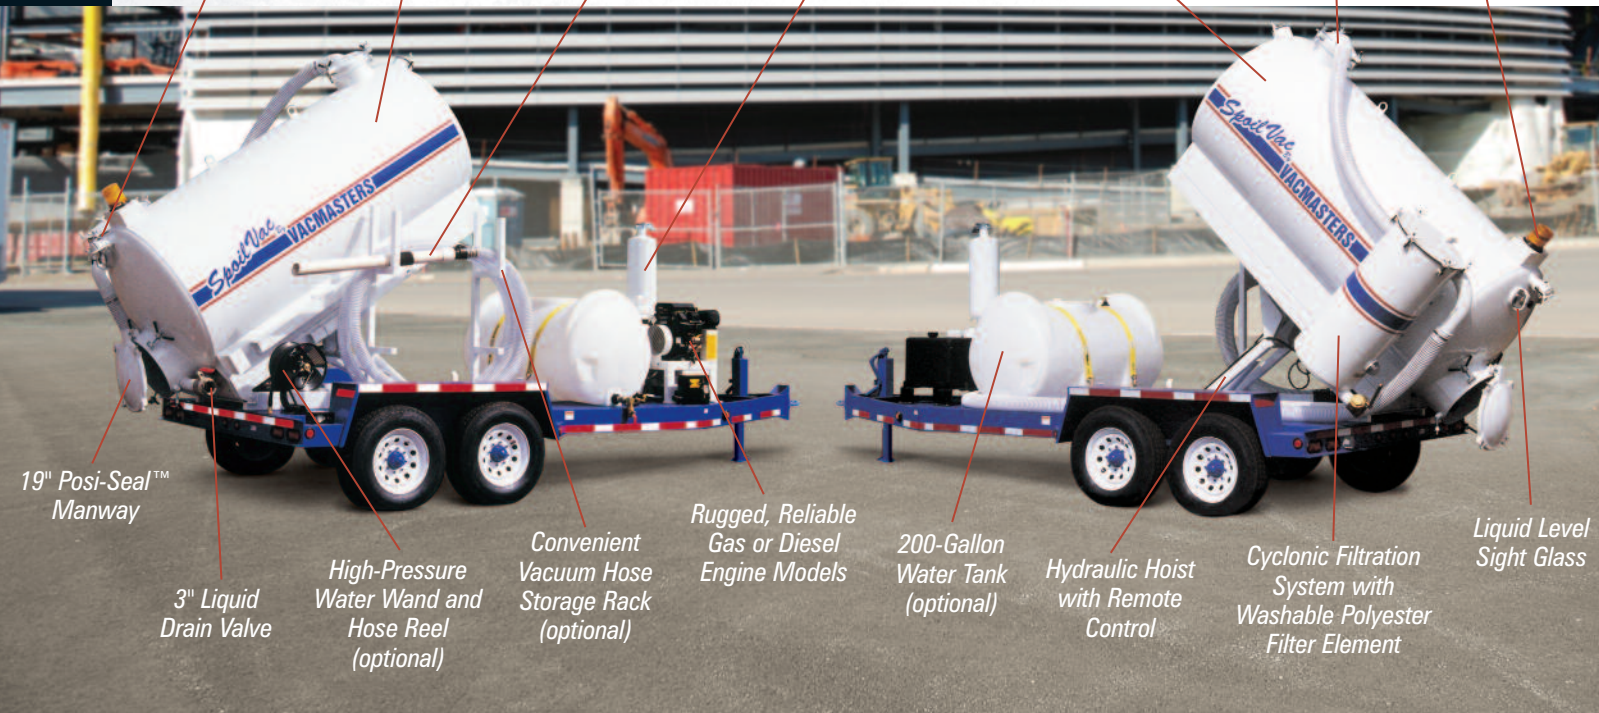

Quick-Disconnect Vacuum Inlet Port

Multiple Sizes of Spoils Tanks Available (800-Gallon Tank Pictured)

3" or 4" Vacuum Hose with Adjustable-Flow Pickup Wand

Positive Displacement Blower with Silencer

Acrylic Urethane Paint Over Bead-Blasted Surface for Durability and Easy Clean Up

Positive Ball Shut-Off Valve

Flashing Beacon

19" Posi-Seal™ Manway

3" Liquid Drain Valve

High-Pressure Water Wand and Hose Reel (optional)

Convenient Vacuum Hose Storage Rack (optional)

Rugged, Reliable Gas or Diesel Engine Models

200-Gallon Water Tank (optional)

Hydraulic Hoist with Remote Control

Cyclonic Filtration System with Washable Polyester Filter Element

Liquid Level Sight Glass

Specifications

POWER SOURCE

3" Vacuum System: 25 HP Kohler Gasoline
 4" Vacuum System: 49 HP Tier 4 Final Kubota Diesel

VACUUM SOURCE

3" Vacuum System: 520 CFM Max. — 14" Hg Max. Vacuum
 4" Vacuum System: 860 CFM Max. — 15" Hg Max. Vacuum
 Adjustable-Flow Pick-Up Wand

SPOILS TANK

200, 500, 800, 1,000 and 1,200 Gallon Sizes (custom sizes available)
 Hot Rolled Carbon Steel with Internal Baffle
 Hydraulic Hoist with Remote Operator's Station

FILTRATION

Cyclonic Filtration System with Washable Filter Cartridge

OPTIONAL HIGH-PRESSURE WATER SYSTEM

2,250 PSI, 3 GPM (gas) 50' Hose Reel and Water Wand
 3,000 PSI, 4 GPM (diesel) 200-Gallon Tank Standard
 (additional sizes available)

AVAILABLE OPTIONS

- Winterizing Kit
- Vacuum Hose Rack
- Traffic Direction Board
- Combination Vacuum/Water Wand
- Worklights
- "Vacuum Cleaner" Pick-Up Head
- Common Baseplate
- Rotating Nozzle
- Fully-Enclosed Power Head
- Toolbox

